



# © DISHWASHING









○ DISHWASHING

# GLASSWASHERS

<b>Glasswashers Tech Wash and Easy Wash</b>	72-73
<b>Glasswashers Tech Wash (basket 350 x 350)</b>	74
Additional models	74
Accessories	74
<b>Glasswashers Tech Wash (basket 400 x 400)</b>	75
Additional models	75
<b>Glasswashers Easy Wash (basket 350 x 350)</b>	76
Additional models	76
Accessories	76
<b>Glasswashers Easy Wash (basket 400 x 400)</b>	77
Additional models	77


**Asber glasswashers come in two different ranges:** Easy Wash for uncomplicated electromechanical operation and Tech Wash for those who prefer high precision with electronic controls.

Both ranges offer excellent washing results and maximum resistance to wear, due to the high quality of the materials employed. In addition, all main glasswasher components are located to be easily accessed during maintenance operations.


Asber Tech Wash has been designed to provide advance features and maximum productivity. Asber Tech Wash glasswashers allows washing glasses up to 220 mm HIGH (350 x 350 mm basket models) or 270 high (400 x 400 mm basket models). They ensure excellent washing and rinsing results, combined with outstanding hygiene, keeping a high level of productivity.



THEY HAVE A FULLY ELECTRONIC CONTROL PANEL AND A SAFETY ELECTROMAGNETIC MICRO-SWITCH WHEN DOOR IS OPENED.

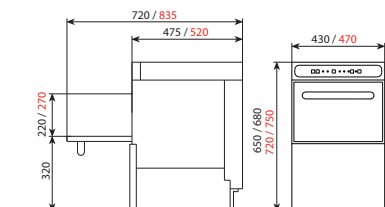

WaterMark Certificate

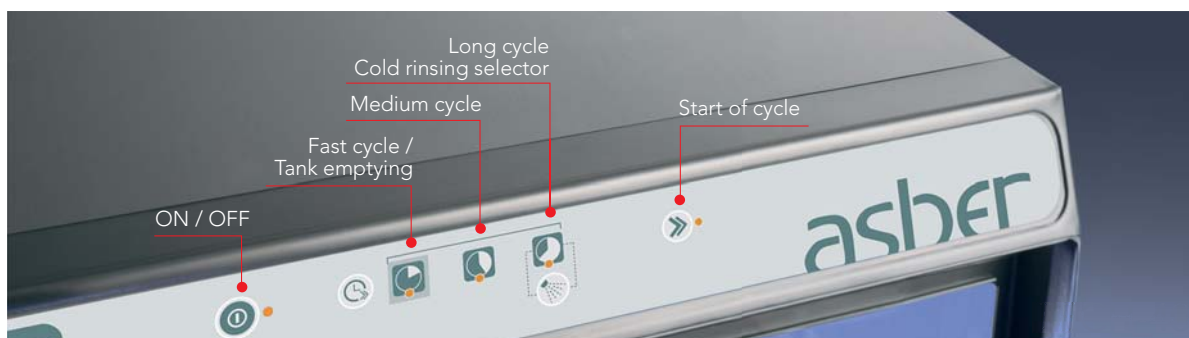



Intuitive and easy-to-use.



Low water consumption: 2-2.5 liters.



Double thermoplastic washing and rinsing arms.



Independent cycle for cold rinsing in 400 x 400 mm models. Complete filtering system to keep clean water longer.



Compact design, with double-wall door, increases security and soundproofing.



Built-in automatic rinse aid and optional detergent dispensers.



AISI 304

Structure fully made of stainless steel.





Safety thermostat and anti-backflow valve.

Asber Easy Wash glasswashers allow washing glasses up to 220 mm HIGH (350 x 350 mm basket models) or 270 high (400 x 400 mm basket models). Asber glasswashers ensure excellent washing and rinsing results, combined with outstanding hygiene, keeping a high level of productivity. All models have a safety electromagnetic micro-switch when door is opened.

# EASY WASH ranges


THEY HAVE AN ELECTROMECHANICAL CONTROL PANEL, VERY INTUITIVE AND EASY-TO-MAINTAIN.

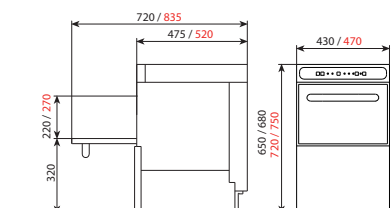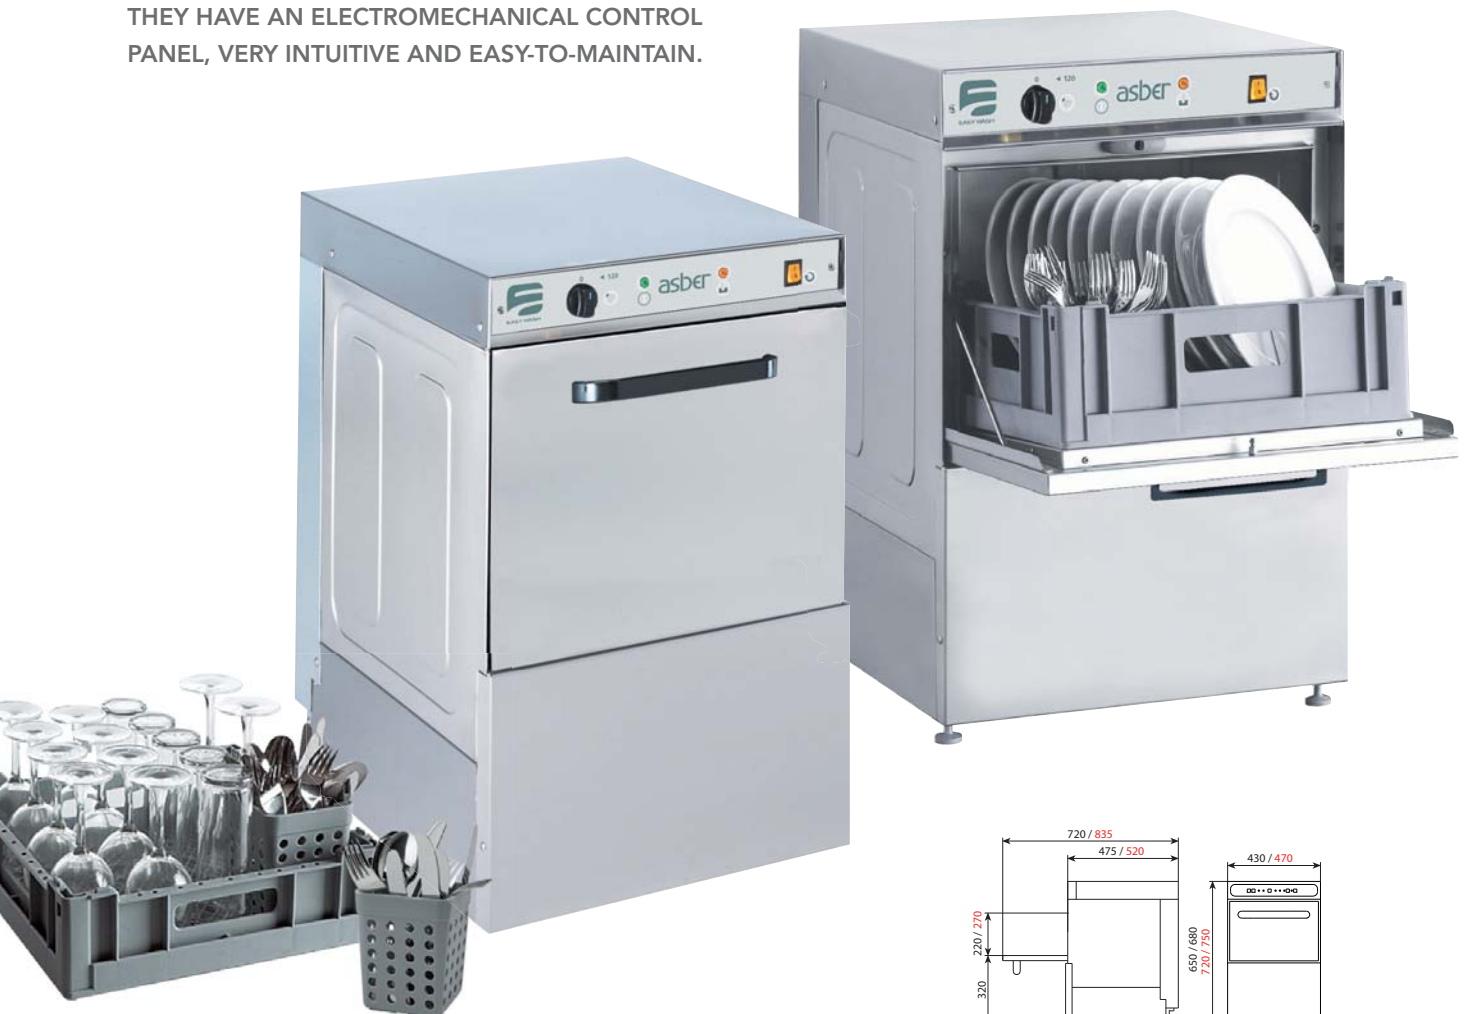



### TECH-350

- Electronic control panel.
- 3 washing cycles:
  - 90" / 120" / 180"
- Tank capacity: 11 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.4 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Temperatures adjusted:
  - Wash 60 °C and rinse 90 °C.
- Safety thermostat and thermostop device.
- Accessories supplied: 2 baskets of 350 x 350 mm and 1 basket for cutlery CU.

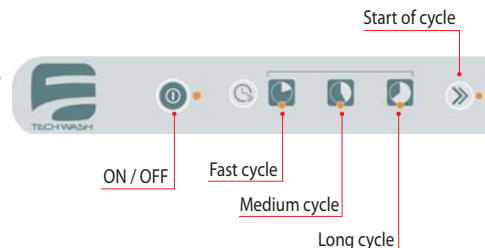


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
TECH-350	19013461	40	190	430 x 475 x 650	Not	2,65	230V-50/60Hz



### TECH-350 DD – WITH DETERGENT DISPENSER

- Electronic control panel.
- 3 washing cycles:
  - 90" / 120" / 180"
- Tank capacity: 11 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.4 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2 l/rinse.
- Built-in rinse aid dispenser and detergent dispenser.
- Anti backflow valve fitted.
- Temperatures adjusted:
  - Wash 60 °C and rinse 90 °C.
- Safety thermostat and thermostop device.
- Accessories supplied: 2 baskets of 350 x 350 mm and 1 basket for cutlery CU.

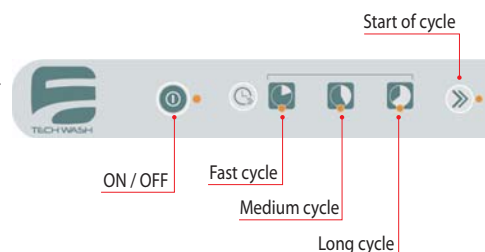

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
TECH-350 DD	19013462	40	190	430 x 475 x 650	Not	2,65	230V-50/60Hz

### ADDITIONAL MODELS

Model	Reference	Voltage (V)	Washing cycles (seconds)	Power (kW)	Features
TECH-350 UK	19013463	230V-50Hz	90/120/180	2,65	With detergent dispenser / not cold rinsing



PL-43  
PL-47



PL-47-L



CLV-35  
CLV-40



CU



CU-7



SP-35  
SP-40


### ACCESSORIES

Model	Reference	Description	For use in	Dimensions (mm)
PL-43	19003461	Supplementary base	All models TECH-350 and EASY-350	430 x 405 x 400
PL-47	19003462	Supplementary base	All models TECH-400 and EASY-400	470 x 450 x 400
PL-47-L	19014796	Base for glasswashers	All models TECH-350 and TECH-400	470 x 520 x 131
CLV-35	19013867	Basket for glasswasher	All models TECH-350 and EASY-350	350 x 350 x 110
CLV-40	19013868	Basket for glasswasher	All models TECH-400 and EASY-400	400 x 400 x 140
CU-7	19000792	Cutlery basket	All baskets	105 x 105 x 130
CU	19020300	Cutlery basket	All baskets	Ø110 x 125
SP-35	19017111	Support for dishes	Basket of 350 x 350 mm	-
SP-40	19017112	Support for 11 dishes	Support for dishes	-



### TECH-400

- Electronic control panel.
- 3 washing cycles:
  - 90" / 120" / 180"
- Tank capacity: 15 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.8 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2.5 l./rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Temperatures adjusted:
  - Wash 60 °C and rinse 90 °C
- Safety thermostat and thermostop device.
- Accessories supplied: 2 baskets of 400 x 400 mm, 1 dish bracket and 1 basket for cutlery CU.

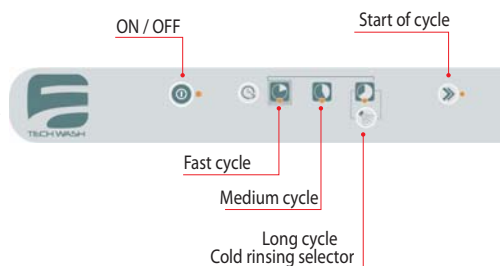


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
TECH-400	19013464	40	270	470 x 520 x 720	Yes	3,05	230V-50/60Hz



### TECH-400 B - WITH DRAIN PUMP

- Electronic control panel.
- 3 washing cycles:
  - 90" / 120" / 180"
- Tank capacity: 15 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.8 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2.5 l./rinse.
- Built-in rinse aid dispenser and drain pump.
- Anti backflow valve fitted.
- Temperatures adjusted:
  - Wash 60 °C and rinse 90 °C.
- Safety thermostat and thermostop device.
- Accessories supplied: 2 baskets of 400 x 400 mm, 1 dish bracket and 1 basket for cutlery CU.

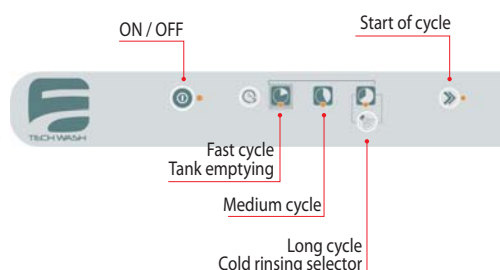


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
TECH-400 B	19013466	40	270	470 x 520 x 720	Yes	3,05	230V-50Hz



### TECH-400 DD – WITH DETERGENT DISPENSER

- Electronic control panel.
- 3 washing cycles:
  - 90" / 120" / 180"
- Tank capacity: 15 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.8 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2.5 l./rinse.
- Built-in rinse aid dispenser and detergent dispenser.
- Anti backflow valve fitted.
- Temperatures adjusted:
  - Wash 60 °C and rinse 90 °C.
- Safety thermostat and thermostop device.
- Accessories supplied: 2 baskets of 400 x 400 mm, 1 dish bracket and 1 basket for cutlery CU.

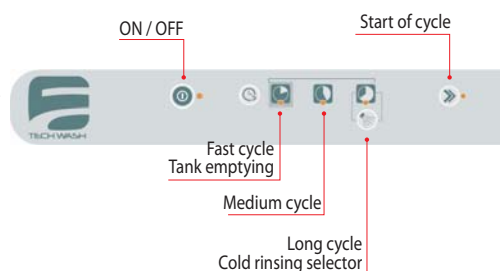

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
TECH-400 DD	19013465	40	270	470 x 520 x 720	Yes	3,05	230V-50/60Hz

### ADDITIONAL MODELS

Model	Reference	Voltage (V)	Washing cycles (seconds)	Power (kW)	Features
TECH-400 B DD	19020481	230V-50/60Hz	90/120/180	3,05	With drain pump / cold rinsing / detergent dispenser
TECH-400 B	19013469	230V-60Hz	90/120/180	3,05	With drain pump / cold rinsing
TECH-400 UK	19013467	230V-50Hz	90/120/180	2,65	With detergent dispenser / cold rinsing
TECH-400 UK B	19013468	230V-50Hz	90/120/180	2,65	With detergent dispenser / drain pump / cold rinsing



**EASY-350**


- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 11 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.4 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Temperatures adjusted:
  - Wash 60 °C and rinse 90 °C.
- Accessories supplied: 2 baskets of 350 x 350 mm and 1 basket for cutlery CU.



Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
EASY-350	19013452	30	190	430 x 475 x 650	Not	2,65	230V-50Hz

**EASY-350 DD – WITH DETERGENT DISPENSER**

- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 11 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.4 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2 l/rinse.
- Built-in rinse aid dispenser and detergent dispenser.
- Anti backflow valve fitted.
- Temperatures adjusted:
  - Wash 60 °C and rinse 90 °C.
- Accessories supplied: 2 baskets of 350 x 350 mm and 1 basket for cutlery CU.

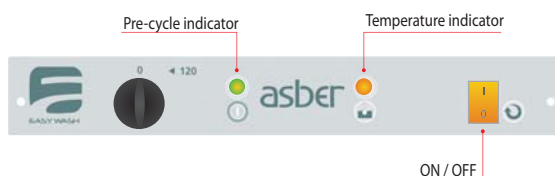

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
EASY-350 DD	19013453	30	190	430 x 475 x 650	Not	2,65	230V-50Hz

**ADDITIONAL MODELS**

Model	Reference	Voltage (V)	Washing cycles (seconds)	Power (kW)	Features
EASY-350	19013551	230V-60Hz	120	2,65	Not cold rinsing
EASY-350 DD	19013552	230V-60Hz	120	2,65	With detergent dispenser / not cold rinsing
EASY-350 UK	19013454	230V-50Hz	120	2,65	With detergent dispenser / not cold rinsing


**PL-43**  
**PL-47****PL-47-L****CLV-35**  
**CLV-40****CU****CU-7****SP-35**  
**SP-40****ACCESSORIES**

Model	Reference	Description	For use in	Dimensions (mm)
PL-43	19003461	Supplementary base	All models TECH-350 and EASY-350	430 x 405 x 400
PL-47	19003462	Supplementary base	All models TECH-400 and EASY-400	470 x 450 x 400
PL-47-L	19014796	Base for glasswashers	All models TECH-350 and TECH-400	470 x 520 x 131
CLV-35	19013867	Basket for glasswasher	All models TECH-350 and EASY-350	350 x 350 x 110
CLV-40	19013868	Basket for glasswasher	All models TECH-400 and EASY-400	400 x 400 x 140
CU-7	19000792	Cutlery basket	All baskets	105 x 105 x 130
CU	19020300	Cutlery basket	All baskets	Ø110 x 125
SP-35	19017111	Support for dishes	Basket of 350 x 350 mm	-
SP-40	19017112	Support for dishes	Basket of 400 x 400 mm	-



**EASY-400**


- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 15 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.8 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2.8 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Safety thermostat.
- Temperatures adjusted:
  - Wash 60 °C and rinse 90 °C.
- Accessories supplied: 2 baskets of 400 x 400 mm, 1 dish bracket and 1 basket for cutlery CU.

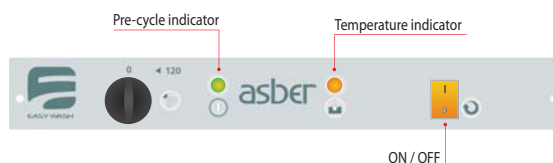

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
EASY-400	19013455	30	270	470 x 520 x 720	Yes	3,05	230V-50Hz

**EASY-400 B - WITH DRAIN PUMP**


- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 15 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.8 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2.8 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted and drain pump.
- Safety thermostat.
- Temperatures adjusted:
  - Wash 60 °C and rinse 90 °C.
- Accessories supplied: 2 baskets of 400 x 400 mm, 1 dish bracket and 1 basket for cutlery CU.

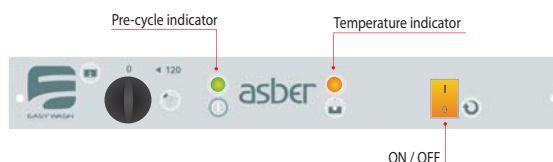

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
EASY-400 B	19013457	30	270	470 x 520 x 720	Yes	3,05	230V-50Hz

**EASY-400 DD – WITH DETERGENT DISPENSER**

- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 15 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.8 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2.8 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted and detergent dispenser.
- Safety thermostat.
- Temperatures adjusted:
  - Wash 60 °C and rinse 90 °C.
- Accessories supplied: 2 baskets of 400 x 400 mm, 1 dish bracket and 1 basket for cutlery CU.

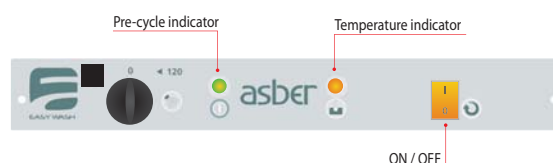

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
EASY-400 DD	19013456	30	270	470 x 520 x 720	Yes	3,05	230V-50Hz

**ADDITIONAL MODELS**

Model	Reference	Voltage (V)	Washing cycles (seconds)	Power (kW)	Features
EASY-400	19013554	230V-60Hz	120	3,05	With cold rinsing
EASY-400 B	19013460	230V-60Hz	120	3,05	With drain pump / cold rinsing
EASY-400 DD	19013555	230V-60Hz	120	3,05	With detergent dispenser / cold rinsing
EASY-400 B DD	19020480	230V-50Hz	120	3,05	With drain pump / cold rinsing / detergent dispenser
EASY-400 UK	19013458	230V-50Hz	120	2,65	With detergent dispenser / cold rinsing
EASY-400 UK B	19013459	230V-50Hz	120	2,65	With detergent dispenser / drain pump / cold rinsing









○ DISHWASHING

# FRONT LOADING DISHWASHERS

Front loading dishwashers Tech Wash and Easy Wash	80-81
Front loading dishwashers Tech Wash (basket 500 x 500)	82
Front loading dishwashers Easy Wash (basket 500 x 500)	83
Additional models. Accessories.	84




**Asber front-opening dishwashers come in two different ranges:** Easy Wash for uncomplicated electromechanical operation and Tech Wash for those who prefer high precision with electronic controls.

Both ranges offer excellent washing results and maximum resistance to wear, due to the high quality of the materials employed. In addition, all main dishwasher components are located to be easily accessed during maintenance operations.

Asber Tech Wash has been designed to provide advance features and maximum productivity. Asber Tech Wash front-opening models allows washing all kinds of ware up to 320 mm high. They ensure excellent washing and rinsing results, combined with outstanding hygiene, keeping a high level of productivity.

**THEY HAVE A FULLY ELECTRONIC CONTROL PANEL AND A SAFETY ELECTROMAGNETIC MICRO-SWITCH WHEN DOOR IS OPENED.**

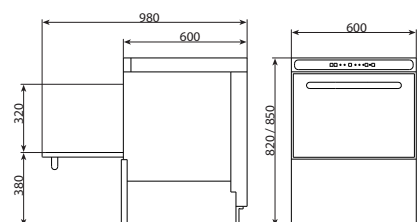

## TECH | Main Features

Production from 540 to 720 pieces/hour, depending on the model.

Fully electronic control panel with membrane keypad. Displays and controls washing status at any time.

Thermo-stop system guaranteeing minimum rinsing temperature of 85°C, enough to remove any germs.

3 washing cycles of 90, 120 and 180 seconds, in standard models. 3 washing cycles of 60, 90 and 180 seconds in high-powered models.

Users could select the washing cycle depending on the type of ware and amount of dirt.

High quality, stainless steel structure guarantees a reliable, robust and durable range with an extended lifetime.

Tank with internal rounded edges to make cleaning operations easier, avoiding grease and dirt built-up, ensuring maximum hygiene.



Intuitive and easy-to-use.



Low water consumption: 2-2.5 liters.



Double thermoplastic washing and rinsing arms.



Independent cycle for cold rinsing in 400 x 400 mm models. Complete filtering system to keep clean water longer.



Compact design, with double-wall door, increases security and soundproofing.



Built-in automatic rinse aid and optional detergent dispensers.



Structure fully made of stainless steel.



Safety thermostat and anti-backflow valve.

Asber Easy Wash front-opening dishwashers allow washing all kinds of dishware up to 320 mm high. Asber front-opening models ensure excellent washing and rinsing results, combined with outstanding hygiene, keeping a high level of productivity. They have an electromechanical control panel, very intuitive and easy-to-maintain. All models have a safety electromagnetic micro-switch when door is opened.

## EASY WASH ranges



### EASY | Main Features

Production from 540 to 720 pieces/hour, depending on the model.

Electromechanical control panel with pilot lights, very easy-to-use.


1 washing cycles of 120 seconds, in standard models. 2 washing cycles of 90 and 180 seconds in high-powered models. Users could select the washing cycle depending on the type of ware and amount of dirt.

High quality, stainless steel structure guarantees a reliable, robust and durable range with an extended lifetime.

Tank with internal rounded edges to make cleaning operations easier, avoiding grease and dirt built-up, ensuring maximum hygiene.




WaterMark Certificate

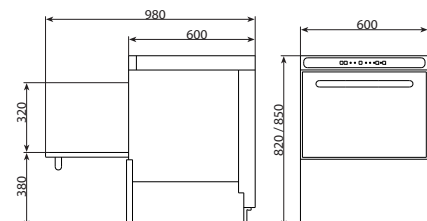



## TECH-500

- Electronic control panel.
- 3 washing cycles:
  - 90" / 120" / 180"
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 2.8 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Safety thermostat and thermostop device.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 4 baskets for cutlery CU-7.

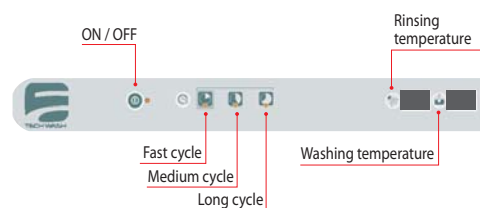


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
TECH-500	19013494	40	320	600 x 600 x 820	3,4	230V-50Hz



## TECH-500 B – WITH DRAIN PUMP

- Electronic control panel.
- 3 washing cycles:
  - 90" / 120" / 180"
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 2.8 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser and drain pump.
- Anti backflow valve fitted.
- Safety thermostat and thermostop device.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 4 baskets for cutlery CU-7.

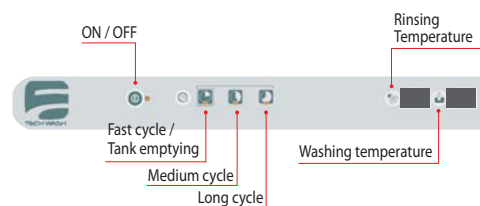


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
TECH-500 B	19013496	40	320	600 x 600 x 820	3,4	230V-50Hz



## TECH-500 DD – WITH DETERGENT DISPENSER

- Electronic control panel.
- 3 washing cycles:
  - 90" / 120" / 180"
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 2.8 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser and detergent dispenser.
- Anti backflow valve fitted.
- Safety thermostat and thermostop device.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 4 baskets for cutlery CU-7.

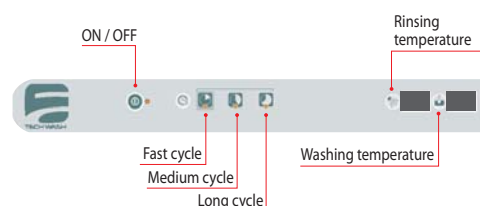


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
TECH-500 DD	19013495	40	320	600 x 600 x 820	3,4	230V-50Hz



## TECH-500 HP – WITH HIGH POWER FEATURES

- Electronic control panel.
- 3 washing cycles:
  - 60" / 90" / 180"
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 6 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Safety thermostat and thermostop device.
- Additional filtering system with inox trays.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Voltage: 380V-50Hz.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 4 baskets for cutlery CU-7.

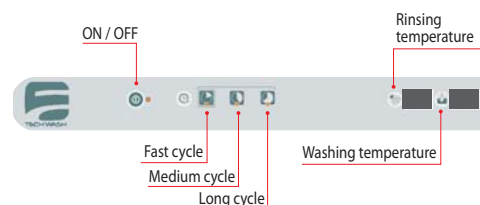


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Break tank	Rinsing pump	Detergent dispenser	Drain pump
TECH-500 HP	19013499	60	320	600 x 600 x 820	6,6	Not	Not	Not	Not
TECH-500 HP W	19013502	60	320	600 x 600 x 820	6,6	Yes	Yes	Yes	Not
TECH-500 HP B	19013501	60	320	600 x 600 x 820	6,6	Not	Not	Not	Yes
TECH-500 HP W B	19013503	60	320	600 x 600 x 820	6,6	Yes	Yes	Yes	Yes
TECH-500 HP DD	19013500	60	320	600 x 600 x 820	6,6	Not	Not	Yes	Not



**EASY-500**


- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 2.8 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Safety thermostat.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 1 baskets for cutlery CU-7.

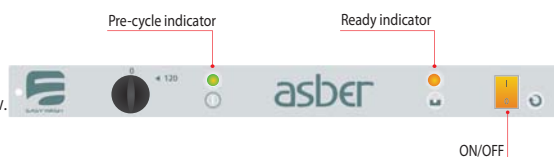

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
EASY-500	19013470	30	320	600 x 600 x 820	3,4	230V-50Hz

**EASY-500 B – WITH DRAIN PUMP**


- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 2.8 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser and drain pump.
- Anti backflow valve fitted.
- Safety thermostat.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 1 baskets for cutlery CU-7.

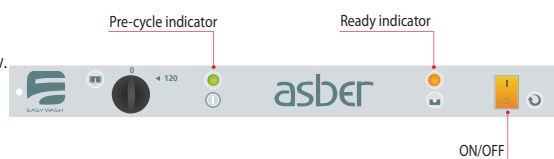

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
EASY-500 B	19013472	30	320	600 x 600 x 820	3,4	230V-50Hz

**EASY-500 DD – WITH DETERGENT DISPENSER**


- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 2.8 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser and detergent dispenser.
- Anti backflow valve fitted.
- Safety thermostat.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 1 basket for cutlery CU-7.

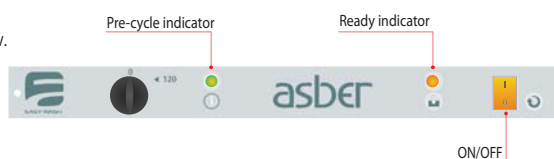

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
EASY-500 DD	19013471	30	320	600 x 600 x 820	3,4	230V-50Hz

**EASY-500 HP – WITH HIGH POWER FEATURES**

- Electromechanical control panel.
- 2 washing cycles:
- 90" / 180"
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 6 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Safety thermostat.
- Additional filtering system with inox trays.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C
- Voltage: 380V-50Hz.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 4 baskets for cutlery CU-7.

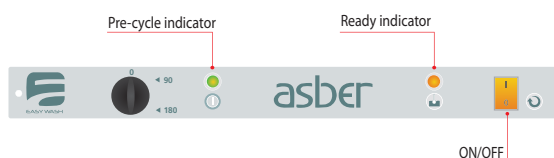

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Break tank	Rinsing pump	Detergent dispenser	Drain pump
EASY-500 HP	19013475	40	320	600 x 600 x 820	6,6	Not	Not	Not	Not
EASY-500 HP B	19013477	40	320	600 x 600 x 820	6,6	Not	Not	Not	Yes
EASY-500 HP W B	19013479	40	320	600 x 600 x 820	6,6	Yes	Yes	Yes	Yes
EASY-500 HP DD	19013476	40	320	600 x 600 x 820	6,6	Not	Not	Yes	Not



## Additional models - Accessorie - Sinks and racks

Model	Reference	Voltage (V)	Washing cycles (seconds)	Power (kW)	Features
TECH-500	19013504	230V-60Hz	90/120/180	3,4	-
TECH-500 B	19013506	230V-60Hz	90/120/180	3,4	With drain pump
TECH-500 DD	19013505	230V-60Hz	90/120/180	3,4	With detergent dispenser
TECH-500 B DD	19020489	230V-50Hz	90/120/180	3,4	With drain pump / detergent dispenser
TECH-500HP	19013507	380V-60Hz	90/120/180	6,6	-
TECH-500 HP B	19013509	380V-60Hz	90/120/180	6,6	With drain pump
TECH-500 HP DD	19013508	380V-60Hz	90/120/180	6,6	With detergent dispenser
TECH-500 HP W	19013510	380V-60Hz	90/120/180	6,6	With break tank / rinsing pump / detergent dispenser
TECH-500 HP W B	19013511	380V-60Hz	90/120/180	6,6	With break tank / rinsing pump / detergent dispenser / drain pump
EASY-500	19013481	230V-60Hz	120	3,4	-
EASY-500 B	19013483	230V-60Hz	120	3,4	With drain pump
EASY-500 DD	19013482	230V-60Hz	120	3,4	With detergent dispenser
EASY-500 B DD	19020485	230V-50Hz	120	3,4	With drain pump and detergent dispenser
EASY-500 W UK B	19013473	230V-50Hz	120	2,8	With break tank / rinsing pump / detergent dispenser / drain pump
EASY-500 HP	19013484	380V-60Hz	90/180	6,6	-
EASY-500 HP B	19013486	380V-60Hz	90/180	6,6	With drain pump
EASY-500 HP DD	19013485	380V-60Hz	90/180	6,6	With detergent dispenser
EASY-500 HP	19013489	230V-60Hz	90/180	6,6	-
EASY-500 HP B	19013491	230V-60Hz	90/180	6,6	With drain pump
EASY-500 HP DD	19013490	230V-60Hz	90/180	6,6	With detergent dispenser
EASY-500 HP W UK B	19013493	230V-60Hz	90/180	6,6	With break tank / rinsing pump / detergent dispenser / drain pump

### SUPPLEMENT BASE

- Base with removable door, to install under a front opening dishwasher, thus improving work ergonomics.
- It can also be used to lift the machine and drain water from the bucket freely with no need to install an additional pump, also to place containers with washing and polishing liquids.
- It includes 2 guides to store two 500 x 500 mm baskets.
- Entirely made of stainless steel.



Model	Reference	For use in	Height until opening door	Dimensions (mm)
PL-60	19017114	All models TECH-500 and EASY-500	780 mm	600 x 540 x 400



○ DISHWASHING

# PASS-THROUGH DISHWASHERS

Pass-through dishwashers	86-87
Pass-through dishwashers Tech Wash	88-89
Additional models	89
Pass-through dishwashers Easy Wash	90-91
Additional models	91



**Asber pass-through dishwashers come in two different ranges:** Easy Wash for uncomplicated electromechanical operation and Tech Wash for those who prefer high precision with electronic controls.

Both ranges offer excellent washing results and maximum resistance to wear, due to the high quality of the materials employed. In addition, all main dishwasher components are located to be easily accessed during maintenance operations.

Asber Tech Wash has been designed to provide advance features and maximum productivity. Asber Tech Wash range of Hood type dishwashers allows washing all kinds of ware up to 420 mm high. Hood-type dishwashers can be installed in line or in a 90° angle configuration. They ensure excellent washing and rinsing results, combined with outstanding hygiene, keeping a high level of productivity.



## TECH | Main Features

Production from 800 to 1200 dishes/hour, depending on the model.

Fully electronic control panel with membrane keypad. Displays and controls washing status at any time.

Thermo-stop system guaranteeing minimum rinsing temperature of 85°C, enough to remove any germs.

3 washing cycles of 90, 120 and 180 seconds, in standard models. 3 washing cycles of 55, 75 and 120 seconds in high-powered models. In addition, in all models continuous cycle up to manual stop. Users could select the washing cycle depending on the type of ware and amount of dirt.

High quality, stainless steel structure guarantees a reliable, robust and durable range with an extended lifetime.

Tank with internal rounded edges to make cleaning operations easier, avoiding grease and dirt built-up, ensuring maximum hygiene.



WaterMark Certificate



Intuitive and easy-to-use.



Low water consumption: 2-2.5 liters.



Double thermoplastic washing and rinsing arms.



Independent cycle for cold rinsing in 400 x 400 mm models. Complete filtering system to keep clean water longer.



Compact design, with double-wall door, increases security and soundproofing.



Built-in automatic rinse aid and optional detergent dispensers.



Structure fully made of stainless steel.



Safety thermostat and anti-backflow valve.

Asber Easy Wash pass-through models allow washing all kinds of dishware up to 420 mm high. Hood-type dishwashers can be installed in line or in a 90° angle configuration.

They ensure excellent washing and rinsing results, combined with outstanding hygiene, keeping a high level of productivity. All models have a safety electromagnetic micro-switch when hood is opened.

## EASY WASH ranges

THEY HAVE AN ELECTROMECHANICAL CONTROL PANEL, VERY INTUITIVE AND EASY-TO-MAINTAIN.



### EASY | Main Features


Production from 800 to 1200 dishes/hour, depending on the model.

Electromechanical control panel with pilot lights, very easy-to-use.

Tank with internal rounded edges to make cleaning operations easier, avoiding grease and dirt built-up, ensuring maximum hygiene.


2 washing cycles of 90 and 180 seconds, in standard models. 3 washing cycles of 55, 75 and 120 seconds in high-powered models. In addition, in all models continuous cycle up to manual stop. Users could select the washing cycle depending on the type of ware and amount of dirt.

High quality, stainless steel structure guarantees a reliable, robust and durable range with an extended lifetime.

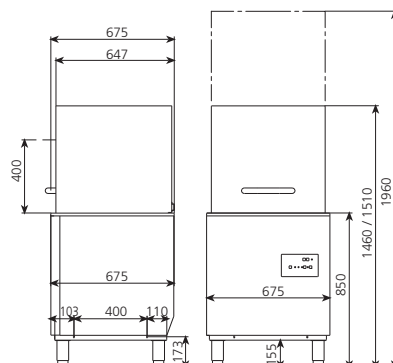

**TECH-H500**


- Electronic control panel.
- 4 washing cycles:
  - 90" / 120" / 180".
  - Continuous cycle up to manual stop.
- Tank capacity: 45 l. / Heating power: 4.5 kw.
- Boiler capacity: 7 l. / Heating power: 6 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 3 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Safety thermostat and thermostop device.
- Digital thermometers to display washing and rinsing temperatures.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 2 baskets for cutlery CU-7.

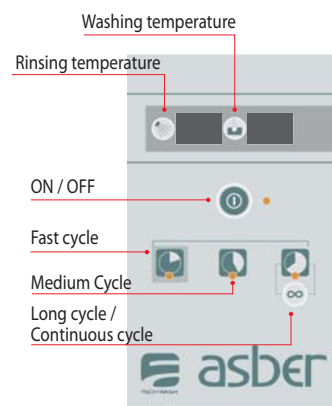

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
TECH-H500	19013537	40	420	675 x 675 x 1440	11,1	380V-50Hz

**TECH-H500 B – WITH DRAIN PUMP**


- Electronic control panel.
- 4 washing cycles:
  - 90" / 120" / 180".
  - Continuous cycle up to manual stop.
- Tank capacity: 45 l. / Heating power: 4.5 kw.
- Booster capacity: 7 l. / Heating power: 6 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 3 l/rinse.
- Built-in rinse aid dispenser and drain pump.
- Safety switch for hood opening.
- Anti backflow valve fitted.
- Digital thermometers to display washing and rinsing temperatures.
- Safety thermostat and thermostop device.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 2 baskets for cutlery CU-7.

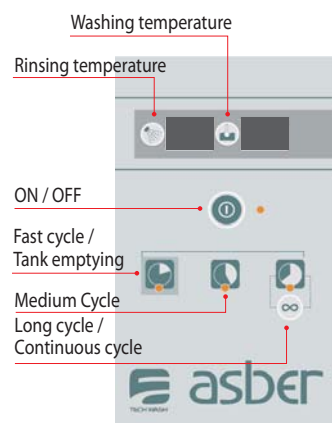

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
TECH-H500 B	19013539	40	420	675 x 675 x 1440	11,1	380V-50Hz

**TECH-H500 DD – WITH DETERGENT DISPENSER**

- Electronic control panel.
- 4 washing cycles:
  - 90" / 120" / 180".
  - Continuous cycle up to the manual stop.
- Tank capacity: 45 l. / Heating power: 4.5 kw.
- Booster capacity: 7 l. / Heating power: 6 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 3 l/rinse.
- Built-in rinse aid dispenser and detergent dispenser.
- Safety switch for hood opening.
- Anti backflow valve fitted.
- Digital thermometers to display washing and rinsing temperatures.
- Safety thermostat and thermostop device.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 2 baskets for cutlery CU-7.

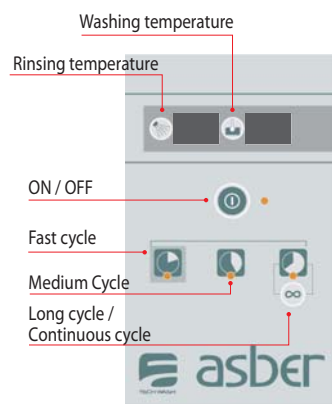


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
TECH-H500 DD	19013538	40	420	675 x 675 x 1440	11,1	380V-50Hz





### TECH-H500 HP - WITH HIGH POWER FEATURES

- Electronic control panel.
- 4 washing cycles:
  - 55" / 75" / 120".
  - Continuous cycle up to the manual stop.
- Tank capacity: 45 l. / Heating power: 4.5 kw.
- Booster capacity: 7 l. / Heating power: 12 kw.
- Wash pump power: 1.2 kw.
- Rinsing consumption: 3 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Safety thermostat and thermostop device.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Voltage: 380V-50Hz.
- Accessories supplied: 2 baskets CP-16/18, 1 basket CT-10 and 8 baskets for cutlery CU-7.

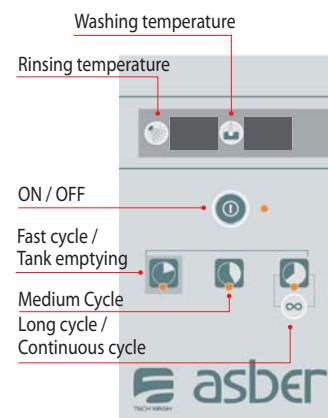

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Break tank	Rinsing pump	Detergent dispenser	Drain pump
TECH-H500 HP	<b>19013540</b>	65	420	675 x 675 x 1440	17,7	Not	Not	Not	Not
TECH-H500 HP B	<b>19013542</b>	65	420	675 x 675 x 1440	17,7	Not	Not	Not	Yes
TECH-H500 HP DD	<b>19013541</b>	65	420	675 x 675 x 1440	17,7	Not	Not	Yes	Not
TECH-H500 HP W B	<b>19013543</b>	65	420	675 x 675 x 1440	17,7	Yes	Yes	Yes	Yes


### ADDITIONAL MODELS

Model	Reference	Voltage (V)	Washing cycles (seconds)	Power (kW)	Features
TECH-H500	<b>19013544</b>	380V-60Hz	90/120/180	11,1	-
TECH-H500 B	<b>19013546</b>	380V-60Hz	90/120/180	11,1	With drain pump
TECH-H500 DD	<b>19013545</b>	380V-60Hz	90/120/180	11,1	With detergent dispenser
TECH-H500 B DD	<b>19020513</b>	380V-50Hz	90/180/120	11,1	With drain pump / detergent dispenser
TECH-H500 HP	<b>19013547</b>	380V-60Hz	55/75/120	17,7	-
TECH-H500 HP B	<b>19013549</b>	380V-60Hz	55/75/120	17,7	With drain pump
TECH-H500 HP DD	<b>19013548</b>	380V-60Hz	55/75/120	17,7	With detergent dispenser
TECH-H500 HP W B	<b>19013550</b>	380V-60Hz	55/75/120	17,7	With break tank / rinsing pump / detergent dispenser / drain pump



## EASY-H500

- Electromechanical control panel.
- 2 washing cycles:
- 90" / 180"
- Tank capacity: 45 l. / Heating power: 4.5 kw.
- Booster capacity: 7 l. / Heating power: 6 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 3 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Safety thermostat.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 2 baskets for cutlery CU-7.

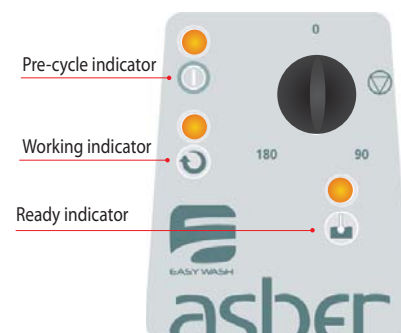


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
EASY-H500	19013512	40	420	675 x 675 x 1440	11,1	380V-50Hz



## EASY-H500 B – WITH DRAIN PUMP

- Electromechanical control panel.
- 2 washing cycles:
- 90" / 180"
- Tank capacity: 45 l. / Heating power: 4.5 kw.
- Booster capacity: 7 l. / Heating power: 6 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 3 l/rinse.
- Built-in rinse aid dispenser and drain pump.
- Anti backflow valve fitted.
- Safety thermostat.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 2 baskets for cutlery CU-7.

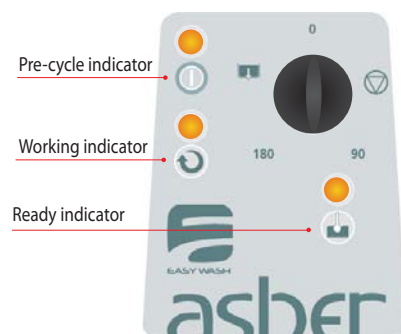


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
EASY-H500 B	19013514	40	420	675 x 675 x 1440	11,1	380V-50Hz



## EASY-H500 DD – WITH DETERGENT DISPENSER

- Electromechanical control panel.
- 2 washing cycles:
- 90" / 180"
- Tank capacity: 45 l. / Heating power: 4.5 kw.
- Booster capacity: 7 l. / Heating power: 6 kw.
- Wash pump power: 0,6 kw.
- Rinsing consumption: 3 l/rinse.
- Built-in rinse aid dispenser and detergent dispenser.
- Anti backflow valve fitted.
- Safety thermostat.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 2 baskets for cutlery CU-7.

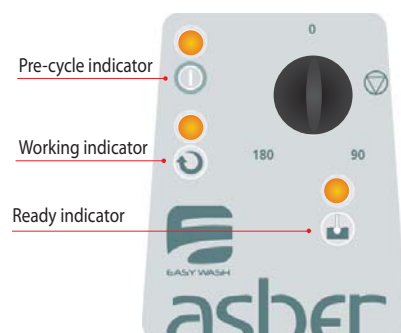


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
EASY-H500 DD	19013513	40	420	675 x 675 x 1440	11,1	380V-50Hz



### EASY-H500 HP - WITH HIGH POWER FEATURES

- Electromechanical control panel.
- 4 washing cycles:
- 55" / 75" / 120"
  - Continuous cycle up to the manual stop.
- Tank capacity: 45 l. / Heating power: 4.5 kw.
- Booster capacity: 7 l. / Heating power: 12 kw.
- Wash pump power: 1.2 kw.
- Rinsing consumption: 3 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Safety thermostat.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Voltage: 380V-50Hz.
- Accessories supplied: 2 basket CP-16/18, 1 basket CT-10 and 8 cutlery container CU-7.

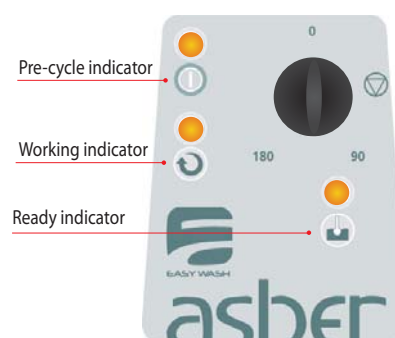

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Break tank	Rinsing pump	Detergent dispenser	Drain pump
EASY-H500 HP	<b>19013515</b>	65	420	675 x 675 x 1440	17,7	Not	Not	Not	Not
EASY-H500 HP B	<b>19013517</b>	65	420	675 x 675 x 1440	17,7	Not	Not	Not	Yes
EASY-H500 HP DD	<b>19013516</b>	65	420	675 x 675 x 1440	17,7	Not	Not	Yes	Not

### ADDITIONAL MODELS

Model	Reference	Voltage (V)	Washing cycles (seconds)	Power (kW)	Features
EASY-H500	<b>19013518</b>	380V-60Hz	90/180	11,1	-
EASY-H500 B	<b>19013520</b>	380V-60Hz	90/180	11,1	With drain pump
EASY-H500 B DD	<b>19020512</b>	380V-50Hz	90/180	11,1	With drain pump / detergent dispenser
EASY-H500 DD	<b>19013519</b>	380V-60Hz	90/180	11,1	With detergent dispenser
EASY-H500 HP	<b>19013521</b>	380V-60Hz	55/75/120	17,1	-
EASY-H500 HP B	<b>19013523</b>	380V-60Hz	55/75/120	17,1	With drain pump
EASY-H500 HP DD	<b>19013522</b>	380V-60Hz	55/75/120	17,1	With detergent dispenser
EASY-H500	<b>19013531</b>	230V-60Hz	90/180	11,1	-
EASY-H500	<b>19013524</b>	230V-50Hz	90/180	11,1	-
EASY-H500 B	<b>19013527</b>	230V-50Hz	90/180	11,1	With drain pump
EASY-H500 B	<b>19013533</b>	230V-60Hz	90/180	11,1	With drain pump
EASY-H500 DD	<b>19013526</b>	230V-50Hz	90/180	11,1	With detergent dispenser
EASY-H500 DD	<b>19013532</b>	230V-60Hz	90/180	11,1	With detergent dispenser
EASY-H500 HP	<b>19013528</b>	230V-50Hz	55/75/120	17,7	-
EASY-H500 HP	<b>19013534</b>	230V-60Hz	55/75/120	17,7	-
EASY-H500 HP B	<b>19013530</b>	230V-50Hz	55/75/120	17,7	With drain pump
EASY-H500 HP B	<b>19013536</b>	230V-60Hz	55/75/120	17,7	With drain pump
EASY-H500 HP DD	<b>19013529</b>	230V-50Hz	55/75/120	17,7	With detergent dispenser
EASY-H500 HP DD	<b>19013535</b>	230V-60Hz	55/75/120	17,7	With detergent dispenser









○ DISHWASHING

# ACCESSORIES

Accessories for dishwashers

98-99

### BASKETS FOR DISHES, TRAYS AND CUTLERY

- Manufactured from hygienic polypropylene in several colours, resistant to high temperatures and damage caused by chemical products.
- Moulded from one double-skinned piece which makes them highly resistant to mechanical shocks.
- Designed so that waste cannot be deposited, ensuring absolute hygiene and optimal protection for dishes.
- Ergonomic handle-type openings on all four sides of the racks to facilitate carrying, stacking and un-stacking.
- Available in different sizes and can be used in all glasswasher and dishwasher models.



CLV-35



CLV-40



SP-35  
SP-40

### BASKETS FOR GLASSWASHERS (350 X 350 MM AND 400 X 400 MM)

Model	Reference	Description	For use in	Dimensions (mm)
CLV-35	19013867	Basket for glasswasher	All models TECH-350 and EASY-350	350 x 350 x 110
CLV-40	19013868	Basket for glasswasher	All models TECH-400 and EASY-400	400 x 400 x 140
SP-35	19017111	Support for dishes	Basket of 350 x 350 mm	-
SP-40	19017112	Support for dishes	Basket of 400 x 400 mm	-



CP-16/18



CT-10



CB-7




CU



CP-12



CT-10 + CU-7



CT-10+ RCT-10



CU-7

### BASKETS FOR DISHWASHERS (500 X 500 MM)

Model	Reference	Usage	Capacity	Dimensions (mm)
CP-16/18	19000487	Dishes	16/18 dishes	500 x 500 x 110
CT-10	19000484	Vessels and cups	According object size	500 x 500 x 110
CB-7	19000483	Trays	8 trays	500 x 500 x 110
RCT-10	19001720	Grid for washing cutlery loose, only usable in basket for glasses or cups	-	455 x 455
CU	19020300	Cutlery basket	15 cutlery	Ø110 x 125
CU-7	19000792	Cutlery basket	15 cutlery	105 x 105 x 130



## BASKETS FOR GLASSES AND CUPS

Baskets designed to dishwashers and to use with glasses and cups of different sizes. Several heights of basket to prevent the contact between fragile parts.



CV-16/105



CV-16/155



CV-16/205

### BASKETS FOR 16 VESSELS OR CUPS (500 X 500 MM)

Model	Reference	Capacity	Ø Glasses (mm)	Maximum stack height (mm)	Dimensions (mm)
CV-16/105	<b>19000488</b>	16 Vessels or Glasses	110	100	500 x 500 x 140
CV-16/155	<b>19000489</b>	16 Vessels or Glasses	110	150	500 x 500 x 190
CV-16/205	<b>19000490</b>	16 Vessels or Glasses	110	200	500 x 500 x 240



CV-25/105



CV-25/155



CV-25/205

### BASKETS FOR 25 VESSELS OR CUPS (500 X 500 MM)

Model	Reference	Capacity	Ø Glasses (mm)	Maximum stack height (mm)	Dimensions (mm)
CV-25/105	<b>19000491</b>	25 Vessels or Glasses	85	100	500 x 500 x 140
CV-25/155	<b>19000492</b>	25 Vessels or Glasses	85	150	500 x 500 x 190
CV-25/205	<b>19000493</b>	25 Vessels or Glasses	85	200	500 x 500 x 240



CV-36/105



CV-36/155



CV-36/205

### BASKETS FOR 36 VESSELS OR CUPS (500 X 500 MM)

Model	Reference	Capacity	Ø Glasses (mm)	Maximum stack height (mm)	Dimensions (mm)
CV-36/105	<b>19000494</b>	36 Vessels or Glasses	70	100	500 x 500 x 140
CV-36/155	<b>19000495</b>	36 Vessels or Glasses	70	150	500 x 500 x 190
CV-36/205	<b>19000496</b>	36 Vessels or Glasses	70	200	500 x 500 x 240

### SUPPLEMENTS TO INCREASE THE HEIGHT OF THE BASKETS

The followings supplements are available if is necessary increase the height of the basket for glasses or cups and to prevent the contact directly between fragile glassware. These are easily assembled through the hook indicated.



Model	Reference	Description	Usage	Dimensions (mm)
SCE-16	<b>19004320</b>	Top supplement 4 x 4	Increase height in 50 mm	500 x 500 x 50
SCE-25	<b>19004321</b>	Top supplement 5 x 5	Increase height in 50 mm	500 x 500 x 50
SCE-36	<b>19004309</b>	Top supplement 6 x 6	Increase height in 50 mm	500 x 500 x 50
ESE-12	<b>19004310</b>	Hook top	Need 12 for each supplement	-





**MULTI-SOLUTION  
MANUFACTURER OF  
FOODSERVICE  
EQUIPMENT**



**Asber Professional**  
Taking Your Business Forward

Contact us at **[www.asberprofessional.com](http://www.asberprofessional.com)**

We'd love to learn how we can partner with you.  
This catalog has been printed using eco-friendly materials and procedures.